FIT 48V

ARKOSLIGHT®



DIMENSIONES



ACCESORIOS



ANTI-GLARE HONEYCOMB LOUVER

TRACK 48V OPTIONS

	PRODUCTO
Nombre	FIT 50 48V SHORT 28° 3000K NT
Referencia	A3460121NT-S
Color	Negro Texturado
RAL	9005
Categoría	TRACKLIGHTS

	FUENTE DE LUZ
Tipo	LED
Flujo Luminoso	1120 Lm
Potencia	12 W
Potencia del sistema	12,63 W
Temperatura de color	3000 K
Índice de reproducción cromática	CRI>90
Estabilidad cromática	MacAdam Step 2
Ángulo del haz de luz	28°
Eficiencia lumínica	82%
Eficacia	93 Lm/W
Corriente	1050 mA
Control por bluetooth	Consultar
Driver	Incluido
Clase de Seguridad Eléctrica	III
Tensión	48 Vdc
Horas de Vida del LED	L80B10 (Tj=85°C) >60.000h

	OTROS DATOS
Estanqueidad	IP20
Ángulo de basculación	90°
Ángulo de giro	360°
Tipo de carril	Track 48V
Peso	350 g.
Peso con embalaje	455 g.
Dimensiones embalaje	218 × 195 × 62 mm
Unidades por embalaje	1
Materiales	Aluminio / Policarbonato

CE

Fit es un proyector para aplicaciones de carril de bajo voltaje disponible en cinco modelos (ø50, ø35, ø35 Double, ø20 y ø20 Double). De geometría cilíndrica y formas esenciales, destaca por su minimalismo estético y su funcionalidad, ya que puede orientarse en todas las direcciones. El perímetro de su boca en negro y su accesorio de lamas tipo panel de abeja acentúan su vocación antideslumbramiento.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

03-11-21 / 03:18

5 Year GUARANTEE*

DIAGRAMA POLAR

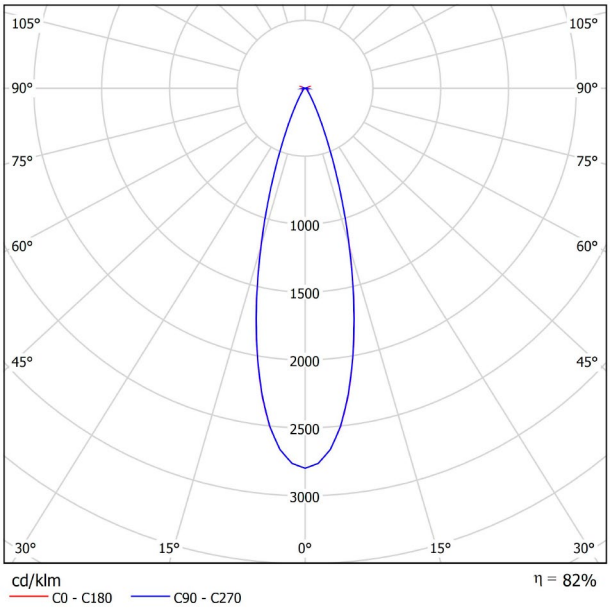

DIAGRAMA CÓNICO

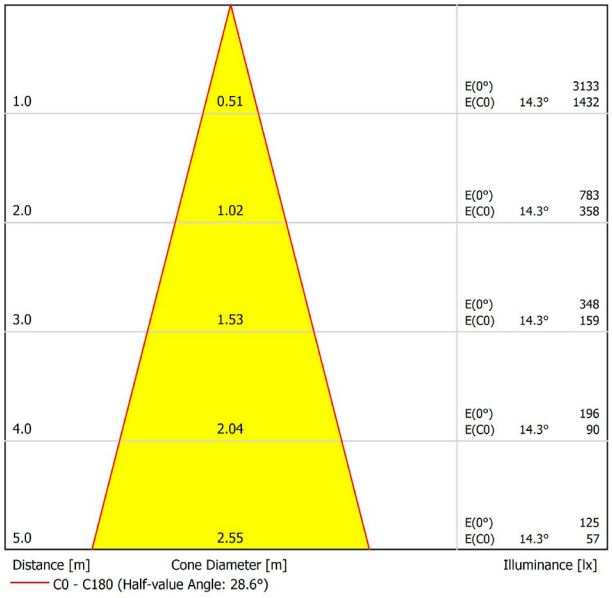

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

PANEL DE ABEJA ANTI-DESLUMBRAMIENTO

ARKOSLIGHT®



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories

NO SE VENDE POR SEPARADO.

Accesorio formado por una parrilla en forma de panel de abeja para reducir el deslumbramiento y la incidencia directa de los rayos en la visión.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5Year GUARANTEE*

TRACK 48V





TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT **1m**	**A338-21-00- | WT | NT |**
TRACK 48V SURFACE SHORT **2m**	**A338-22-00- | WT | NT |**
TRACK 48V SURFACE SHORT **3m**	**A338-23-00- | WT | NT |**
TRACK 48V SURFACE SHORT **Corner 90º One Plane**	**A338-24-00- | WT | NT |**

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane



*Electrical connection not included

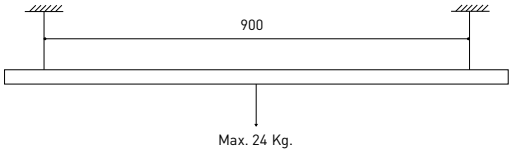

		P	V	D
CONSTANT VOLTAGE LED POWER SUPPLY	**0434-01-21**	75W	48V	180 x 52 x 30mm
	0434-01-22	150W	48V	240 x 60 x 49mm

220 / 240 V ~

DROP VOLTAGE TABLE

		CABLE LENGHT (m)			
		5	10	20	30
POWER (W)	**CABLE SECTION** (mm^2)	**TRACK LENGHT** (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

ALL 48V TRACK



TRACK 48V **Live-End Connector**

A338-00-01- | W | N |



TRACK 48V **Central Connector**

A338-00-02- | W | N |



TRACK 48V **Corner Connector**

A338-00-12- | W | N |



TRACK 48V **Wireless Control**

0434-01-31- | W | N | Casambi/AAG Stucchi App



TRACK 48V **Corner 90º Connector One Plane**

A338-00-24- | W | N |

*Not suitable for trimless version

COLOUR | **N** ■ RAL 9005 | **W** □ RAL 9016 | **NT** ■ RAL 9005 | **WT** □ RAL 9016 |

TRACK 48V

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11



TRACK 48V SURFACE SHORT End

A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE SHORT 48V



TRACK 48V Power Supply Case

A338-00-20- | WT | NT | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | WT | NT | NO DIM

A338-00-23- | WT | NT | DIM

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | WT | NT |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | W | N | NO DIM

A338-00-17- | W | N | DIM

*For remote power supply

WIRE TRIMLESS ACCESSORIES



FEED

MAINS TRIMLESS* NO DIM

A023-00-01- | W | N |

MAINS THICK TRIMLESS* DIM

A023-00-02- | W | N |

REMOTE INCL Ø20



FASTENING

STEEL CABLE TRIMLESS*

A023-00-05- | W | N |

INCL Ø20

MAINS TRIMLESS



MAINS THICK TRIMLESS



STEEL CABLE TRIMLESS

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT