

Start Spot IP65 Fire

Start Spot Fire 540lm 3CCT IP65 WH

0059830

Image not found.

Características del producto

- Integrated LED fire rated recessed spotlight, white bezel colour, three temperature light colours selectable: 3000K, 4000K, 6500K. Lumen output 540lm (4000K), 5.5W, dimmable trailing/leading edge, 60° degree beam angle, polycarbonate and steel body with aluminium bezel, low profile 60mm recessed depth, IP65 frontal degree, IK03, loop-in/loop-out terminals for fast wiring, 87mm bezel diameter, 70-75mm cutout, clear lens. . Fire rated 30,60,90 minutes.

DESCRIPCIÓN DEL PRODUCTO

Nombre del producto	Start Spot Fire 540lm 3CCT IP65 WH
Tecnología	LED
Cap/Base	N/A
Housing	Metal/plastic
Montaje	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	540
Luminaire efficacy (lm/W)	98
Temperatura de color (K)	4000
Color de la luz	Neutral White
IRC (Ra)	80
Variación de color inicial tras el incendio (SDCM)	SDCM6
Beam Angle (°)	60
Grupo de riesgo fotobiológico	RG0
Consumo total de energía (W)	5.5
Electrical protection	Class II
Tipo de sistema de control	LED driver constant current
Dimmable	Sí
Minimum dimming level (%)	10
LED Flickering Rate	Medium (21% - 40%)
Color carcasa luminaria	RAL 9003 - Signal white
IP rating	IP65/20
IK rating	IK03
Product EAN number	5410288598307
Dimming method	Mains: leading / trailing edge

TABLA DE DATOS

Informacion General

Nombre del producto	Start Spot Fire 540lm 3CCT IP65 WH
Tecnología	LED
Cap/Base	N/A
Housing	Metal/plastic

Start Spot IP65 Fire

Start Spot Fire 540lm 3CCT IP65 WH

0059830

Montaje	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	3 years

Datos ópticos

Fixture luminous flux (lm)	540
Luminaire efficacy (lm/W)	98
Temperatura de color (K)	4000
Correlated colour temperature range (K)	3000 - 6500
Colour Code	840
Color de la luz	Neutral White
IRC (Ra)	80
Variación de color inicial tras el incendio (SDCM)	SDCM6
Beam Angle (°)	60
Distribution type	Symmetric
Grupo de riesgo fotobiológico	RG0

Datos eléctricos

Consumo total de energía (W)	5.5
Tensión de red (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	25
Electrical protection	Class II
Tipo de sistema de control	LED driver constant current
Dimmable	Sí
Minimum dimming level (%)	10
Drive current (mA)	135
Drive current - Range (mA)	14mA / 135mA
Corriente de irrupción (A)	10
Duración de irrupción	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Luminarias máximas por 10A C Interruptor automático	50
Max. Luminaires per 13A C Breaker	65
Luminarias máximas por 16A C Interruptor automático	80
Max. Luminaires per 20A C Breaker	100
Max. Luminaires per 10A B Breaker	35
Max. Luminaires per 13A B Breaker	45
Max. Luminaires per 16A B Breaker	56
Max. Luminaires per 20A B Breaker	70

Start Spot IP65 Fire

Start Spot Fire 540lm 3CCT IP65 WH

0059830

Información de vida útil

Vida útil media - L70 B50	124000
Vida media - L80/B20	59000
Vida media - L90/B10	27000

Datos físicos

Color carcasa luminaria	RAL 9003 - Signal white
IP rating	IP65/20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Acabado del reflector	None
Longitud (mm)	87
Anchura (mm)	87
Nominal Product Height (mm)	60
Nominal Product Diameter (mm)	87
Cutout Dimensions (W x L in mm or Diameter in mm)	70-75
Peso (kg)	0.27
Recessed Depth (mm)	55

Empaquetado







Descripción del paquete	Carton
Product EAN number	5410288598307
Longitud del embalaje individual(cm)	10.5
Anchura única del embalaje (cm)	7.0
Packaging single depth (cm)	10.5
DUN14 (outer)	15410288598304
Cantidad del embalaje por cajas	50
Packaging outer length / height (cm)	54.5
Packaging outer width (cm)	23.0
Packaging outer depth (cm)	37.0

Información de seguridad

Condiciones óptimas de funcionamiento (°C)	-10-40
--	--------

FOTOMETRÍA

Start Spot IP65 Fire
Start Spot Fire 540lm 3CCT IP65 WH
0059830

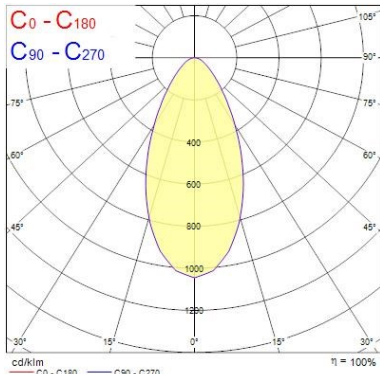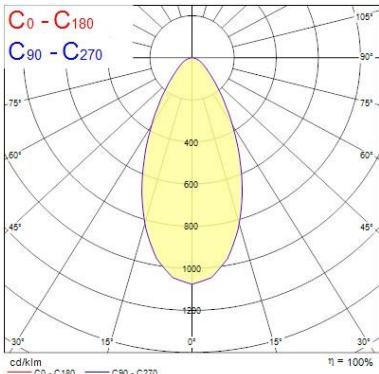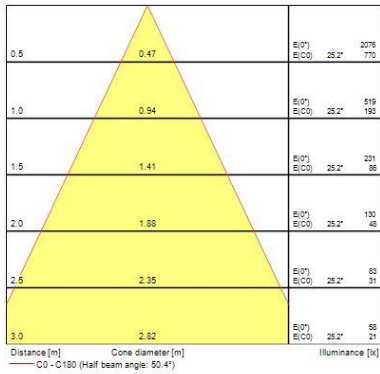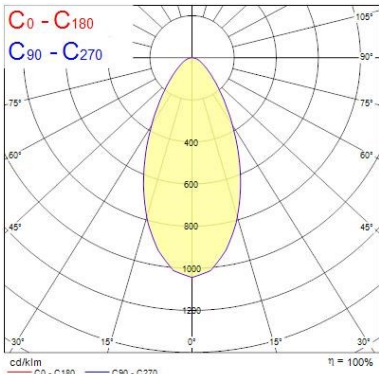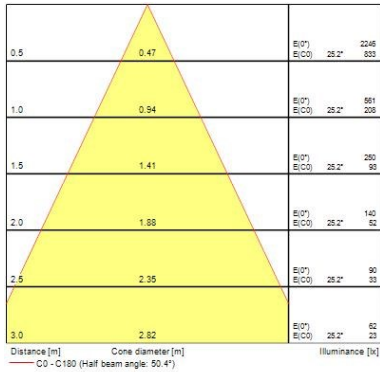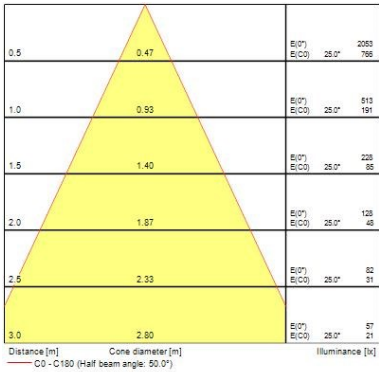

DIBUJOS TÉCNICOS