






IP 42



	240 V~
	50 / 60 Hz
	1 x 2,5 mm ² 2x1,5mm ²
	-5°C / +45°C
	 PIR
	Max.
	Min.
	8 m

 										
230 V~	1000 W	4,3 A	500 VA	2,1 A	5 x (2x36 W)	2,1 A	250 VA	1,1 A	500 VA	2,1 A

 										
230 V~	5 x (2x36 W)	2,1 A	250 W	1,1 A	250 VA	1,1 A	250 VA	1,1 A	250 W	1,1 A

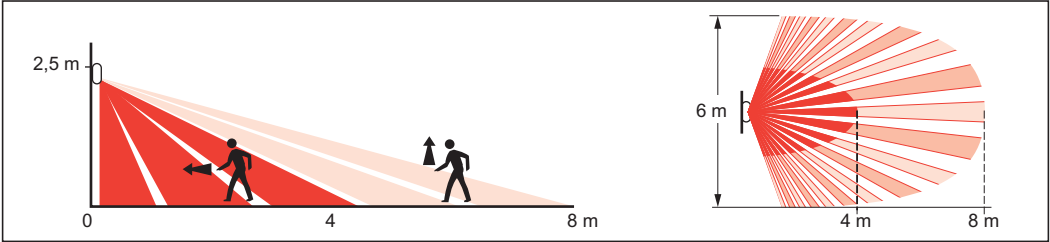


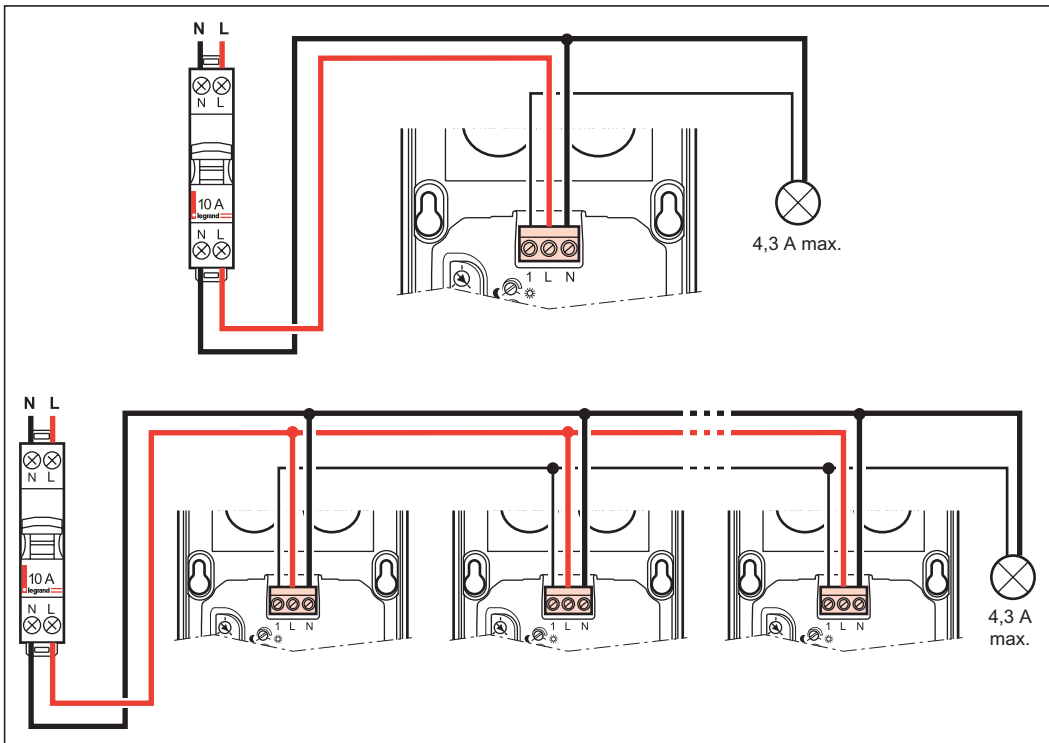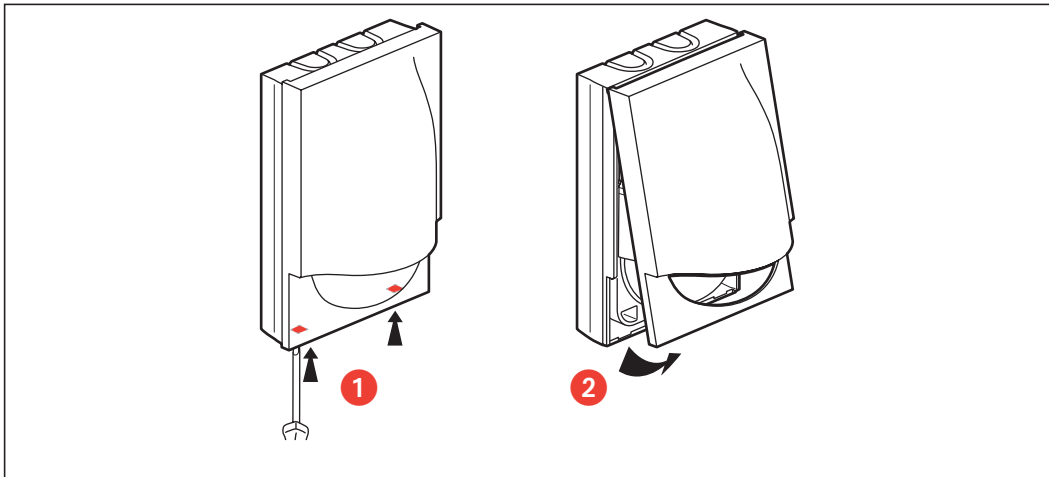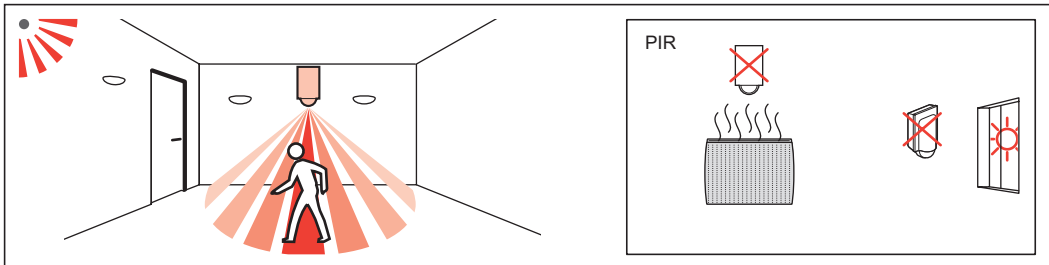

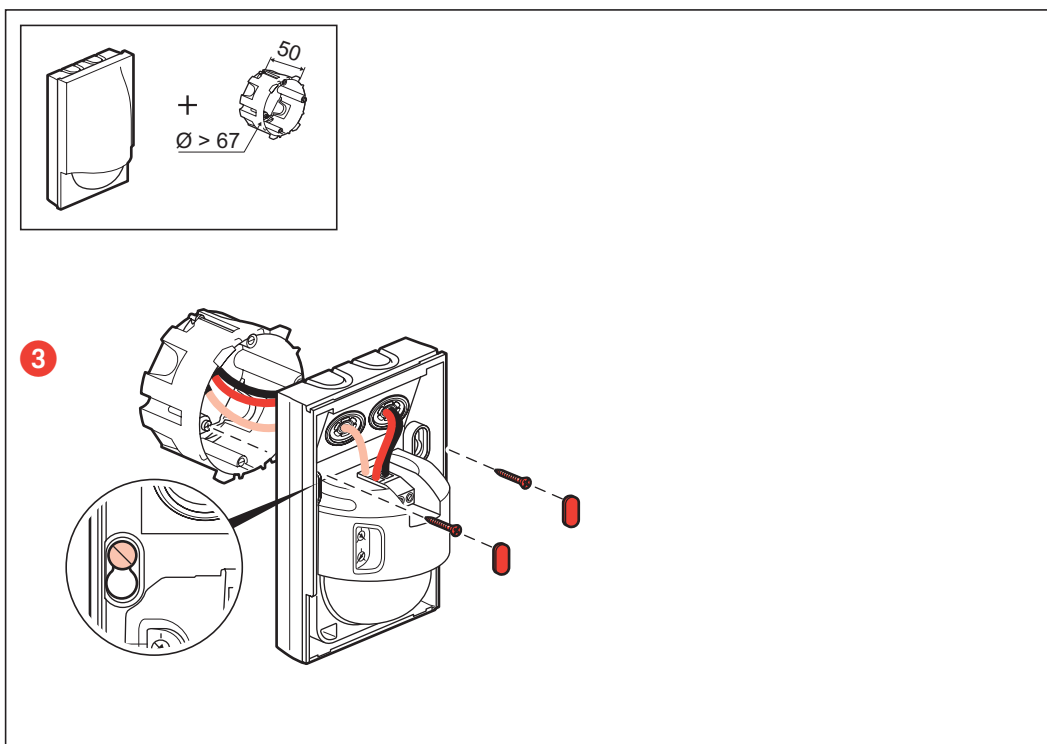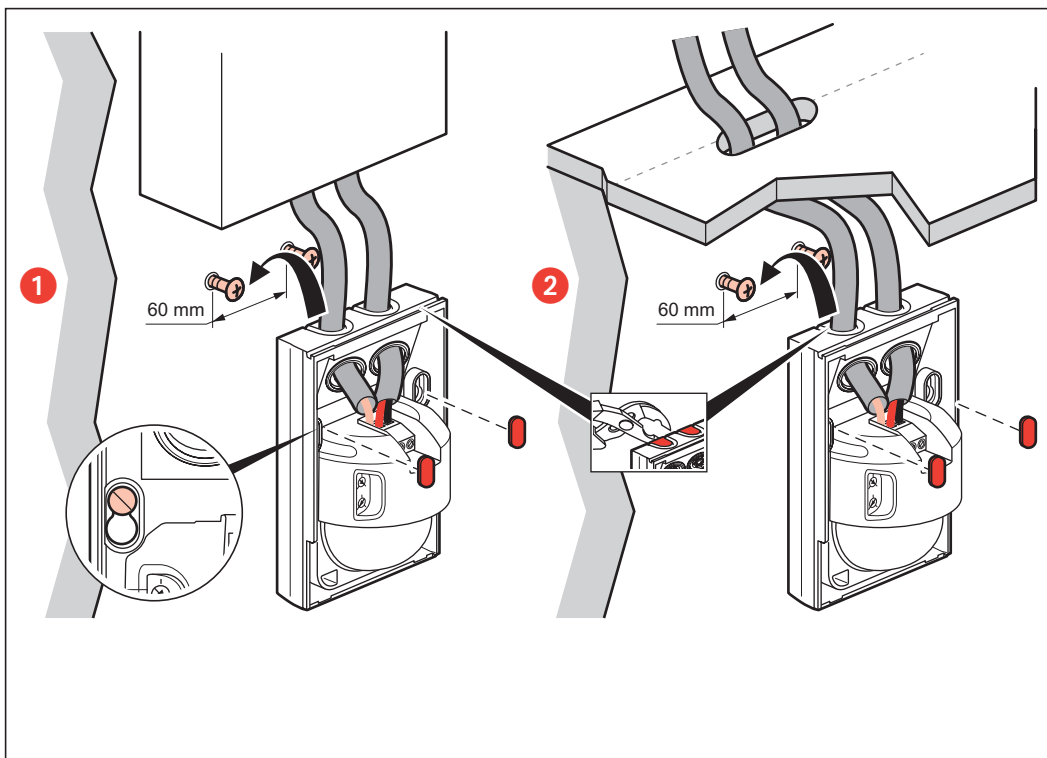



 Auto ON/OFF



www.legrandoc.com


	10 - 1275 lux - Max.
	10 sec - 10 min
	8m
Mode	Auto

- Potentiomètre de luminosité
- Daylight setpoint

- Potentiomètre de temporisation
- Timedelay

- Cellule de luminosité
- Daylight sensor

- Capteur PIR
- PIR sensor

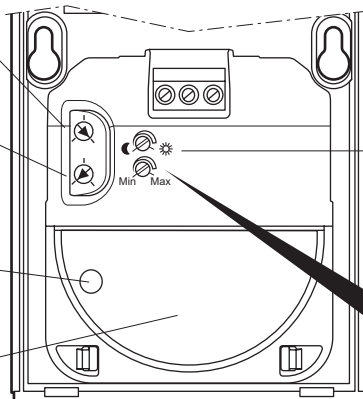

 10 lux 1275 lux

- Max : Mode Test
- Max: Test Mode

