




## DIMENSIONES



## ACCESORIOS



ANTI-GLARE HONEYCOMB LOUVER



TRACK 48V OPTIONS

## PRODUCTO

|            |                         |
|------------|-------------------------|
| Nombre     | FIT 35 48V 29° 3000K WT |
| Referencia | A3450121WT              |
| Color      | Blanco Texturado        |
| RAL        | 9016                    |
| Categoría  | TRACKLIGHTS             |

## FUENTE DE LUZ

|                                  |                           |
|----------------------------------|---------------------------|
| Tipo                             | LED                       |
| Flujo Luminoso                   | 630 Lm                    |
| Potencia                         | 5,5 W                     |
| Potencia del sistema             | 5,79 W                    |
| Temperatura de color             | 3000 K                    |
| Índice de reproducción cromática | CRI>90                    |
| Estabilidad cromática            | MacAdam Step 2            |
| Ángulo del haz de luz            | 29°                       |
| Eficiencia lumínica              | 80%                       |
| Eficacia                         | 115 Lm/W                  |
| Corriente                        | 500 mA                    |
| Control por bluetooth            | Consultar                 |
| Driver                           | Incluido                  |
| Clase de Seguridad Eléctrica     | III                       |
| Tensión                          | 48 Vdc                    |
| Horas de Vida del LED            | L80B10 (Tj=85°C) >60.000h |

## OTROS DATOS

|                       |                          |
|-----------------------|--------------------------|
| Estanqueidad          | IP20                     |
| Ángulo de basculación | 90°                      |
| Ángulo de giro        | 360°                     |
| Tipo de carril        | Track 48V                |
| Peso                  | 180 g.                   |
| Peso con embalaje     | 250 g.                   |
| Dimensiones embalaje  | 188 x 165 x 53 mm        |
| Unidades por embalaje | 1                        |
| Materiales            | Aluminio / Policarbonato |



Fit es un proyector para aplicaciones de carril de bajo voltaje disponible en cinco modelos (ø50, ø35, ø35 Double, ø20 y ø20 Double). De geometría cilíndrica y formas esenciales, destaca por su minimalismo estético y su funcionalidad, ya que puede orientarse en todas las direcciones. El perímetro de su boca en negro y su accesorio de lamas tipo panel de abeja acentúan su vocación antideslumbramiento.

DIAGRAMA POLAR



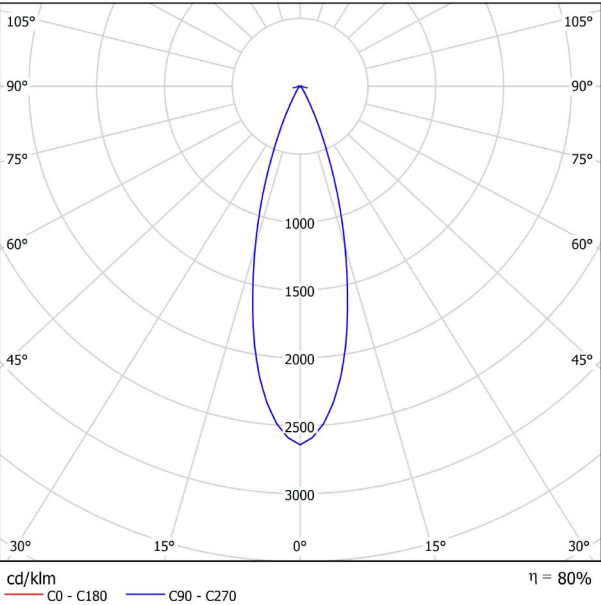


DIAGRAMA CÓNICO



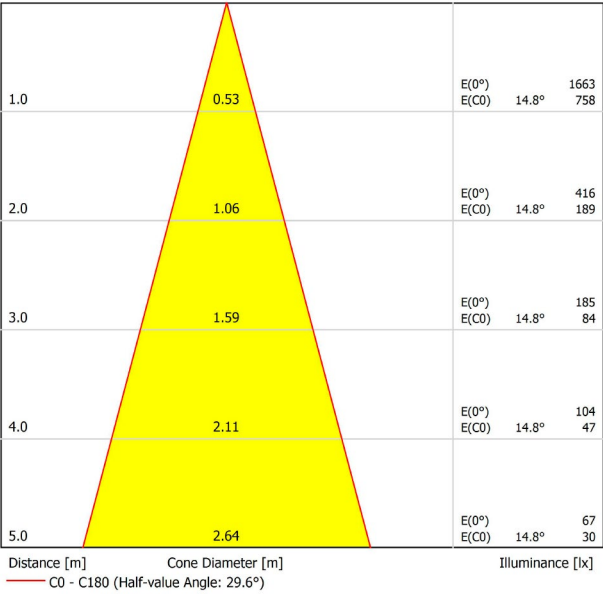


| PRODUCT                   |                             |
|---------------------------|-----------------------------|
| Model                     | Anti-glare Honeycomb Louver |
| Reference                 | A345-00-00                  |
| Category                  | Accessories                 |
| NO SE VENDE POR SEPARADO. |                             |



Accesorio formado por una parrilla en forma de panel de abeja para reducir el deslumbramiento y la incidencia directa de los rayos en la visión.

## 48V SYSTEM

# TRACK 48V



### TRACK 48V TRIMLESS


|                                          |             |    |   |
|------------------------------------------|-------------|----|---|
| TRACK 48V TRIMLESS 1m                    | A338-01-00- | WT | N |
| TRACK 48V TRIMLESS 2m                    | A338-02-00- | WT | N |
| TRACK 48V TRIMLESS 3m                    | A338-03-00- | WT | N |
| TRACK 48V TRIMLESS Corner 90° One Plane  | A338-06-00- | WT | N |
| TRACK 48V TRIMLESS Corner 90° Two Planes | A338-07-00- | WT | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



### TRACK 48V TRIMLESS


#### Corner 90° One Plane




\*Electrical connection not included

### TRACK 48V TRIMLESS

#### Corner 90° Two Planes



\*Electrical connection not included




### TRACK 48V SURFACE

|                                        |             |    |    |
|----------------------------------------|-------------|----|----|
| TRACK 48V SURFACE 1m                   | A338-11-00- | WT | NT |
| TRACK 48V SURFACE 2m                   | A338-12-00- | WT | NT |
| TRACK 48V SURFACE 3m                   | A338-13-00- | WT | NT |
| TRACK 48V SURFACE Corner 90° One Plane | A338-14-00- | WT | NT |




### TRACK 48V SURFACE

#### Corner 90° One Plane



\*Electrical connection not included

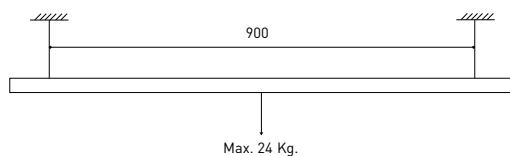

|                                   |            | P    | V   | D               |
|-----------------------------------|------------|------|-----|-----------------|
| CONSTANT VOLTAGE LED POWER SUPPLY | 0434-01-21 | 75W  | 48V | 180 x 52 x 30mm |
|                                   | 0434-01-22 | 150W | 48V | 240 x 60 x 49mm |

220 / 240 V~


### DROP VOLTAGE TABLE

|           |                     | CABLE LENGTH (m) |    |    |    |
|-----------|---------------------|------------------|----|----|----|
|           |                     | 5                | 10 | 20 | 30 |
| POWER [W] | CABLE SECTION (mm²) | TRACK LENGTH (m) |    |    |    |
|           |                     | 50               | 50 | 30 | X  |
| 75        | 0,75                | 50               | 50 | 50 | 50 |
|           | 1,5                 | 50               | 50 | 50 | 50 |
| 150       | 0,75                | 40               | 15 | X  | X  |
|           | 1,5                 | 50               | 40 | 20 | X  |

48V SYSTEM


# TRACK 48V

## ALL 48V TRACK

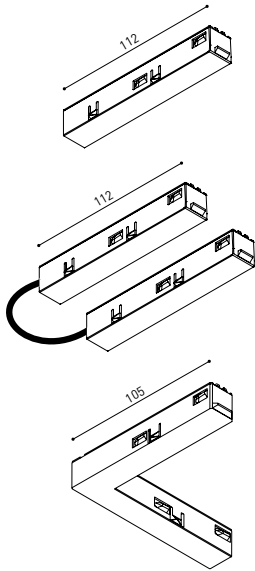

**TRACK 48V Live-End Connector**

A338-00-01- | W | N |




**TRACK 48V Central Connector**

A338-00-02- | W | N |

**TRACK 48V Corner Connector**

A338-00-12- | W | N |



**TRACK 48V Corner 90° Connector One Plane**


A338-00-24- | W | N |

\*Not suitable for trimless version

**TRACK 48V Wireless Control**

0434-01-31- | W | N | Casambi/AAG Stucchi App

## TRIMLESS 48V

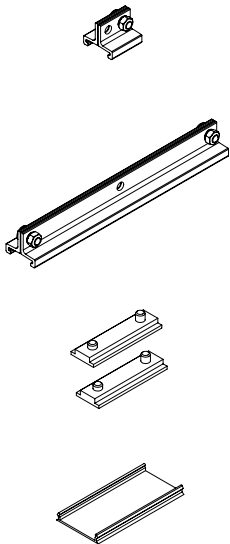

**TRACK 48V TRIMLESS Short T-Bracket**

A338-00-03



**TRACK 48V Clamp for M6 ROD**

A338-00-09

\*See accessories quantities

**TRACK 48V TRIMLESS Long T-Bracket**

A338-00-04




**TRACK 48V Track Clamp**

A338-00-10

\*See accessories quantities

**TRACK 48V TRIMLESS Straight Joiners (2 units)**

A338-00-05- | WT | N |



**TRACK 48V TRIMLESS Suspension Kit**

A338-00-08

\*See accessories quantities

**TRACK 48V TRIMLESS Plaster Installation Guard 1m**

A338-00-21

**\* SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End


A338-00-06- | WT | NT |



TRACK 48V TRIMLESS & SURFACE End Feed


A338-00-07- | WT | NT |

SURFACE, SUSPENSION 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11




TRACK 48V Power Supply Case

A338-00-20- | WT | NT | NO DIM

\*To be installed aside 48V Surface Tracks  
Power supply not included

SUSPENSION 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | WT | NT | NO DIM

A338-00-23- | WT | NT | DIM

\*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | WT | NT |




TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | W | N | NO DIM

A338-00-17- | W | N | DIM

\*For remote power supply

WIRE TRIMLESS ACCESSORIES




FEED

MAINS TRIMLESS\*

A023-00-01- | W | N | NO DIM

MAINS THICK TRIMLESS\*

A023-00-02- | W | N | DIM



FASTENING

STEEL CABLE TRIMLESS\*

A023-00-05- | W | N |



MAINS TRIMLESS



MAINS THICK TRIMLESS



STEEL CABLE TRIMLESS



COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

\* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT