

Bulkhead

9/15.5W, 1000/1800lm, 115 lm/W, Dip Switch 2 CCT
3000/4000K, IP54, On/Off, White, Microwave

ID: 0028920280

GTIN: 7630268420819


5 YEARS *
WARRANTY



Technical Data

Rated luminous flux according to IEC 62722-2-1:	1000...1800 lm
Luminaire efficacy:	115...115 lm/W
Colour temperature:	3000...4000 K
Colour rendering index CRI:	80-89
Colour consistency (McAdam ellipse):	SDCM4
Beam angle:	Open beam/diffuse
Light distributor:	Diffuser lens/optic/panel
Energy efficiency class of the light source according to EU regulation 2019/2015:	D
Protection class according to IEC 61140:	II
Nominal voltage:	220...240 V
Nominal current:	77...77 mA
Max. system power:	15.5 W
Power factor:	0.9
Max. number of luminaires per miniature circuit breaker B16 (MCB):	45
Max. number of luminaires per miniature circuit breaker C16 (MCB):	65
Connection type:	Push-in clamp
Rated lifetime L70/B50 at 25 °C:	100000 h
Impact strength:	IK07
Degree of protection (IP), rear side:	IP54
Degree of protection (IP), front side:	IP54
Rated ambient temperature according to IEC 62722-2-1:	-20...40 °C
Filament test according to IEC 60695-2-11:	650 °C - 30 s
Photobiological safety according to EN 62471:	RG0
Covering of the luminaire with thermally insulating material possible:	no
Housing material:	Plastic
Height/depth:	60 mm
Outer diameter:	300 mm
Suitable for emergency lighting:	no
With movement sensor:	yes
With light sensor:	yes
With control gear:	yes
Type of control gear:	LED operating device current-controlled
Dimmable:	no
Light distribution:	Symmetric



Additional Information




Ø300mm



60mm

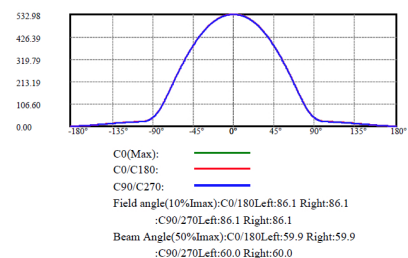



Bulkhead


9/15.5W, 1000/1800lm, 115 lm/W, Dip Switch 2 CCT
3000/4000K, IP54, On/Off, White, Microwave

ID: 0028920280

GTIN: 7630268420819

5 YEARS *
WARRANTY



Driver included: Yes
Driver internal or external: Internal
Type of LED driver: Leedarson integrated driver
Number of driver: 1
Mounting method: Wall-mounted/Ceiling-mounted/Surface-mounted
Cable connection details(method, qty, diameter):Quick connection, 3 pcs, 0.75-1.5mm²
Certification/Norms: CE, ERP(new), ROHS, REACH
Net weight(kg): 0.862kg
Gross weight with packaging(kg): 4.43KG
Accessories included in the packaging: Expansion pipe*2pcs+Screw*2pcs+Zinc plated screw*6pcs
+Zinc plated spring* 1pcs+Wire clip*2pcs
Frequency(Hz): 50/60Hz
Number of luminaires on a 10A MCB type B: 28
Number of luminaires on a 10A MCB type C: 30
Rated life time L80/B10 at 25°: 50000H
SDCM(self-centered): SDCM<4
Material cover: PC
Sensor master-slave function: Yes
Dimmable: NA
Dimming Method:NA
Linkable: Yes
Flicker free: Yes



Φ300mm



60mm

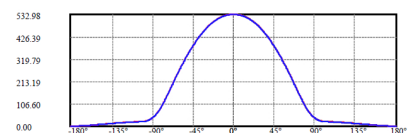

C0(Max):
C0/C180:
C90/C270:
Field angle(10%Imax):C0/180Left:86.1 Right:86.1
:C90/270Left:86.1 Right:86.1
Beam Angle(50%Imax):C0/180Left:59.9 Right:59.9
:C90/270Left:60.0 Right:60.0