# Filament Milky

A60, E27,7W,2700K,806lm,115lm/W,BA360,RA80,Dim, Class E,SDCM<6,15000H

ID: 0019590109

GTIN: 7630268419769

2 YEARS * WARRANTY

2700K | 7W LED = Equiv. 60W | TRIAC | BA 360° | 15000H | CRI >80 | 20000 | 0.5 second
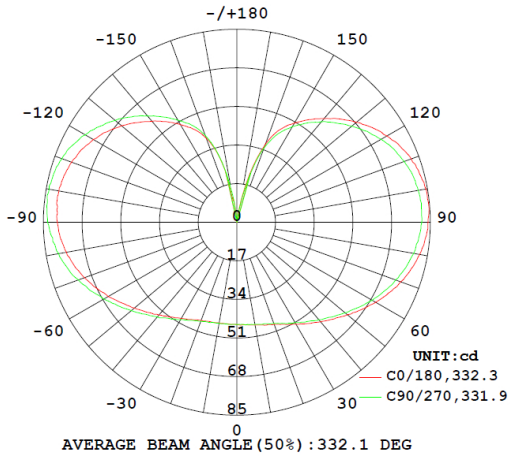
| Technical Data | |
|---|---|
| Luminous flux: | 806...806 lm |
| Colour temperature: | 2700...2700 K |
| Colour rendering index CRI: | 80-89 |
| Colour consistency (McAdam ellipse): | SDCM6 |
| Colour of light according to EN 12464-1: | Warm white < 3300 K |
| Beam angle: | 360...360 ° |
| Lamp efficacy: | 115 lm/W |
| Lamp shape: | Pear-shape |
| Filament lamp: | yes |
| Lamp power: | 7...7 W |
| Power factor: | 0.7 |
| Nominal voltage: | 220...240 V |
| Nominal current: | 40...43 mA |
| Voltage type: | AC |
| Energy efficiency class according to EU regulation 2019/2015: | E |
| Weighted energy consumption in 1000 hours: | 7 kWh |
| Average nominal lifetime: | 15000 h |
| Photobiological safety according to EN 62471: | RG0 |
| Min. number of switching cycles: | 20000 |
| Socket: | E27 |
| Lamp designation: | A-type |
| Type of glass/cover: | Opal |
| Housing colour: | White |
| Diameter: | 60 mm |
| Length: | 108 mm |
| Suitable for electronic ballast: | no |
| Suitable for magnetic ballast: | no |
| Rated luminous flux according to IEC 62612: | 806 lm |
| Colour: | White |
| Dimming phase cut-off (trailing edge): | no |
| Dimming phase cut-on (leading edge): | no |
| Dimming Touch and Dim: | yes |
| Dimming Zigbee: | no |
| Dimming Bluetooth: | no |