

IP20 LED Batten - Twin

LED IP20 BATTEN L1200 TWIN 4000K

0045163

Características del producto

- full range of LED Battens to replace traditional T8 battens (600mm, 1200mm, 1500mm and 1800mm), ease of installation, 4000K, 25000h lifetime



DESCRIPCIÓN DEL PRODUCTO

Nombre del producto	LED IP20 BATTEN L1200 TWIN 4000K
Tecnología	LED
General application	Residential & Consumer
ETIM Class	EC000109
Warranty	2 years
Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	110
Temperatura de color (K)	4000
Color de la luz	Neutral White
IRC (Ra)	80
Grupo de riesgo fotobiológico	RG0
Consumo total de energía (W)	30
Electrical protection	Class I
IP rating	IP20
IK rating	IK02
Product EAN number	5410288451633

TABLA DE DATOS

Informacion General

Nombre del producto	LED IP20 BATTEN L1200 TWIN 4000K
Tecnología	LED
General application	Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Warranty	2 years

Datos ópticos

Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	110
Temperatura de color (K)	4000
Color de la luz	Neutral White
IRC (Ra)	80

IP20 LED Batten - Twin

LED IP20 BATTEN L 1200 TWIN 4000K
0045163

Grupo de riesgo fotobiológico RG0

Datos eléctricos

Consumo total de energía (W)	30
Tensión de red (V)	220-240V
Electrical protection	Class I
Drive current (mA)	240
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Luminarias máximas por 10A C Interruptor automático	27
Max. Luminaires per 13A C Breaker	34
Luminarias máximas por 16A C Interruptor automático	42
Max. Luminaires per 20A C Breaker	54
Max. Luminaires per 10A B Breaker	18
Max. Luminaires per 13A B Breaker	23
Max. Luminaires per 16A B Breaker	28
Max. Luminaires per 20A B Breaker	36

Información de vida útil

Vida útil media - L70 B50	25000
---------------------------	-------

Datos físicos


IP rating	IP20
IK rating	IK02
Longitud (mm)	1200
Anchura (mm)	82
Nominal Product Height (mm)	48
Peso (kg)	1.06

Empaquetado

Descripción del paquete	Mix blister(20% carton, 80% pl)
Product EAN number	5410288451633
Longitud del embalaje individual(cm)	120.0
Anchura única del embalaje (cm)	8.22
Packaging single depth (cm)	4.8
DUN14 (outer)	15410288451630
Cantidad del embalaje por cajas	12
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	22.5
Packaging outer depth (cm)	28.0

FOTOMETRÍA

IP20 LED Batten - Twin
LED IP20 BATTEN L1200 TWIN 4000K
0045163

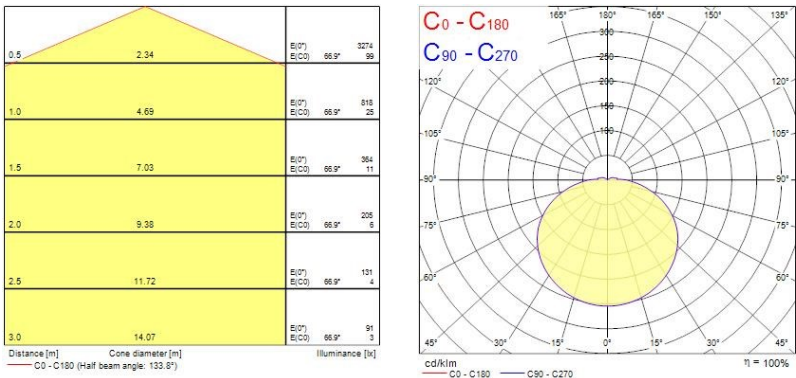

DIBUJOS TÉCNICOS

