


# MANGUITO DERIVACIÓN DE LATÓN

## BRASS INTAKE CLAMP

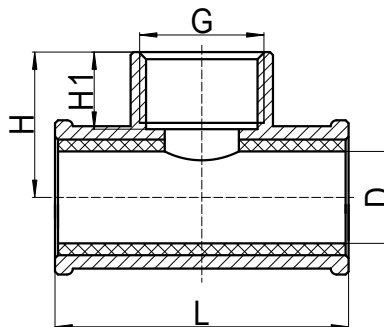

### INFORMACIÓN TÉCNICA - TECHNICAL INFORMATION

| DN            | COD.     | DIMENSIONES - DIMENSIONS |        |            |        |         | Peso aprox.<br>Weight aprox.<br>(g) |
|---------------|----------|--------------------------|--------|------------|--------|---------|-------------------------------------|
|               |          | L (mm)                   | D (mm) | G (inches) | H (mm) | H1 (mm) |                                     |
| 10 x 1/2" F   | VS701010 | 44,5                     | 8,5    | 1/2"       | 18,5   | 9,0     | 94                                  |
| 12 x 1/2" F   | VS701012 | 45,0                     | 10,5   | 1/2"       | 19,5   | 9,0     | 105                                 |
| 14 x 1/2" F   | VS701014 | 49,5                     | 12,5   | 1/2"       | 20,5   | 9,0     | 141                                 |
| 15 x 1/2" F   | VS701015 | 49,5                     | 15,0   | 1/2"       | 24,5   | 13,0    | 162                                 |
| 16 x 1/2" F   | VS701016 | 49,5                     | 14,5   | 1/2"       | 21,5   | 9,0     | 153                                 |
| 18 x 1/2" F   | VS701018 | 50,0                     | 18,0   | 1/2"       | 26,0   | 12,0    | 182                                 |
| 20 x 1/2" F   | VS701020 | 59,5                     | 19,0   | 1/2"       | 24,0   | 9,0     | 215                                 |
| 22 x 1/2" F   | VS701022 | 59,5                     | 22,0   | 1/2"       | 23,5   | 12,0    | 202                                 |
| 25 x 3/4" F   | VS701025 | 64,5                     | 23,5   | 3/4"       | 28,0   | 10,5    | 249                                 |
| 28 x 3/4" F   | VS701028 | 69,5                     | 28,0   | 3/4"       | 30,0   | 15,0    | 296                                 |
| 32 x 3/4" F   | VS701032 | 68,0                     | 30,0   | 3/4"       | 32,0   | 13,5    | 361                                 |
| 35 x 3/4" F   | VS701035 | 70,0                     | 35,0   | 3/4"       | 32,5   | 15,0    | 420                                 |
| 42 x 1" F     | VS701042 | 80,0                     | 42,0   | 1"         | 43,5   | 17,0    | 595                                 |
| 54 x 1 1/4" F | VS701054 | 100,0                    | 54,0   | 1 1/4"     | 49,5   | 19,0    | 915                                 |

### CARACTERÍSTICAS BÁSICAS

- Cuerpo y tuerca en latón MS58.
- Goma en EPDM.
- Tornillos en hierro niquelado.
- Método de fabricación: Forja en caliente.
- Rosca de unión según UNE-EN ISO 228-1.

### APLICACIONES GENERALES

- Agua sanitaria fría y caliente.

### INSTRUCCIONES DE MONTAJE

- Aplicar en la rosca teflón o sellante similar para obtener una mayor estanqueidad en la unión.
- Evitar el exceso del material añadido para prevenir posibles roturas por el excesivo apriete.
- Colocar el accesorio en la instalación, con atención de no exceder el apriete de la pieza.

#### Observaciones:

Dada la complejidad, variedad y gran cantidad de especificaciones particulares de cada instalación, en conjunción con la existencia de diversos factores que pueden afectar a las condiciones de trabajo y naturaleza del producto, es responsabilidad del usuario final realizar los ensayos necesarios para garantizar el correcto funcionamiento del producto en cada aplicación concreta.

La instalación del producto deberá realizarse y mantenerse siguiendo códigos de buena práctica y/o estándares existentes.

Nota : Debido al constante desarrollo de nuestros productos, los datos suministrados pueden ser alterados sin previo aviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

### BASIC FEATURES

- Body and nut in brass MS58.
- Rubber in EPDM.
- Screw in iron and nickel plated.
- Production method: Hot forging.
- Threads according to EN ISO 228-1.

### GENERAL APPLICATIONS

- Cold and hot sanitary water.

### ASSEMBLING INSTRUCTIONS

- Place over the fitting PTFE or similar sealant in order to obtain a better tightness on the coupling.
- Avoid any surplus of sealant in order to prevent possible breakings caused by excessive clamping.
- Connect the fitting with the installation. Pay attention to not exceeding in fitting clamping.

#### Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Rev.2-04.20



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España  
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: [ventas@atusagroup.com](mailto:ventas@atusagroup.com)  
[www.atusagroup.com](http://www.atusagroup.com)