

IP20 LED Batten - Single

LED IP20 BATTEN L1500 SINGLE 4000K

0045160



Características del producto

- full range of LED Battens to replace traditional T8 battens (600mm, 1200mm, 1500mm and 1800mm), ease of installation, 18W, 2400 lum, 4000K, 25000h lifetime



DESCRIPCIÓN DEL PRODUCTO

Nombre del producto	LED IP20 BATTEN L1500 SINGLE 4000K
Tecnología	LED
General application	Residential & Consumer
ETIM Class	EC000109
Warranty	2 years
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	133
Temperatura de color (K)	4000
Color de la luz	Neutral White
IRC (Ra)	80
Grupo de riesgo fotobiológico	RG0
Consumo total de energía (W)	18
Electrical protection	Class I
IP rating	IP20
IK rating	IK02
Product EAN number	5410288451602

TABLA DE DATOS

Informacion General

Nombre del producto	LED IP20 BATTEN L1500 SINGLE 4000K
Tecnología	LED
General application	Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Warranty	2 years

Datos ópticos

Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	133
Temperatura de color (K)	4000
Color de la luz	Neutral White
IRC (Ra)	80

IP20 LED Batten - Single

LED IP20 BATTEN L 1500 SINGLE 4000K
0045160

Grupo de riesgo fotobiológico RG0

Datos eléctricos

Consumo total de energía (W)	18
Tensión de red (V)	220-240V
Electrical protection	Class I
Drive current (mA)	120
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Luminarias máximas por 10A C Interruptor automático	22
Max. Luminaires per 13A C Breaker	28
Luminarias máximas por 16A C Interruptor automático	36
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	15
Max. Luminaires per 13A B Breaker	19
Max. Luminaires per 16A B Breaker	24
Max. Luminaires per 20A B Breaker	30

Información de vida útil

Vida útil media - L70 B50	25000
---------------------------	-------

Datos físicos


IP rating	IP20
IK rating	IK02
Longitud (mm)	1500
Anchura (mm)	43
Nominal Product Height (mm)	48
Peso (kg)	0.52

Empaquetado

Descripción del paquete	Mix blister(20% carton, 80% pl)
Product EAN number	5410288451602
Longitud del embalaje individual(cm)	150.0
Anchura única del embalaje (cm)	4.25
Packaging single depth (cm)	4.72
DUN14 (outer)	15410288451609
Cantidad del embalaje por cajas	20
Packaging outer length / height (cm)	152.0
Packaging outer width (cm)	22.5
Packaging outer depth (cm)	25.5

FOTOMETRÍA

IP20 LED Batten - Single
LED IP20 BATTEN L1500 SINGLE 4000K
0045160

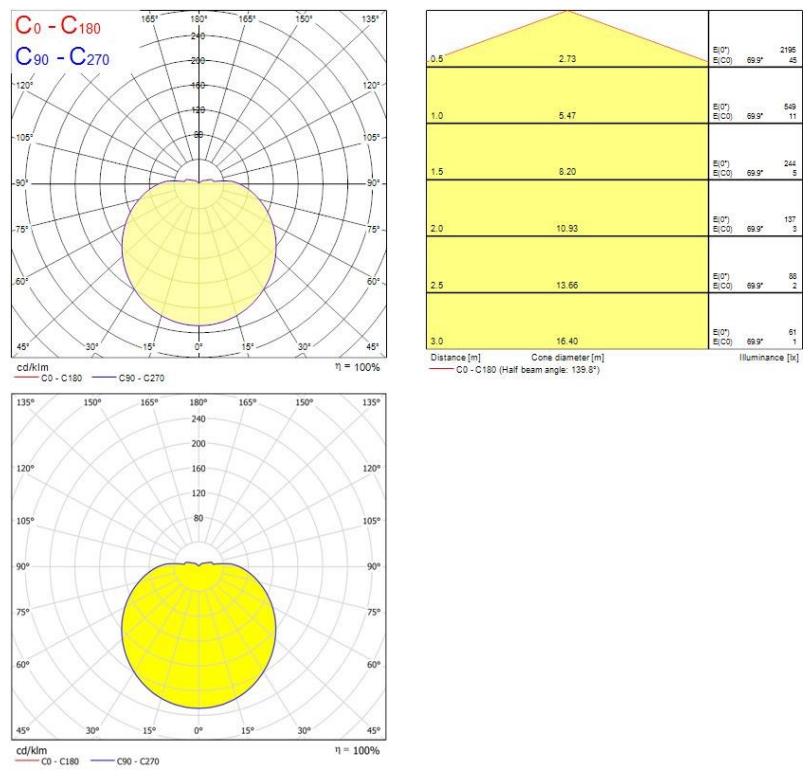

DIBUJOS TÉCNICOS

