

START DOWNLIGHT IP44 205


START Downlight 205 IP44 2025lm 840

0030329



Características del producto

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 60mm product depth and 205mm cutout. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 2025LM, 21W, 101lm/W, 4000K, Driver Current: 600mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 60x205mm, Class 2, 220-240V

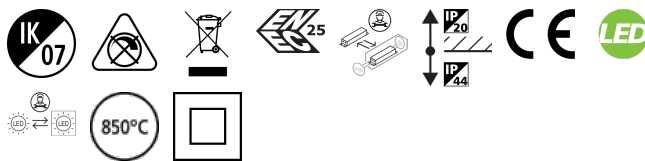

DESCRIPCIÓN DEL PRODUCTO

Nombre del producto	START Downlight 205 IP44 2025lm 840
Tecnología	LED
Housing	Aluminium
Montaje	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
FI del número electrónico	4278153
Warranty	5 years
Fixture luminous flux (lm)	2025
Luminaire efficacy (lm/W)	96
LOR (%)	100
Temperatura de color (K)	4000
IRC (Ra)	80
Variación de color inicial tras el incendio (SDCM)	SDCM5
Beam Angle (°)	74
Glare control	< 25
Grupo de riesgo fotobiológico	RG0
Consumo total de energía (W)	21
Electrical protection	Class II
Tipo de sistema de control	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Color carcasa luminaria	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303291
Dimming method	N/A

TABLA DE DATOS

Informacion General

START DOWNLIGHT IP44 205

START Downlight 205 IP44 2025lm 840

0030329

Nombre del producto	START Downlight 205 IP44 2025lm 840
Tecnología	LED
Housing	Aluminium
Montaje	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
FI del número electrónico	4278153
Warranty	5 years

Datos ópticos

Fixture luminous flux (lm)	2025
Luminaire efficacy (lm/W)	96
LOR (%)	100
Temperatura de color (K)	4000
IRC (Ra)	80
Variación de color inicial tras el incendio (SDCM)	SDCM5
Cromaticidad ajustable	No
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Grupo de riesgo fotobiológico	RG0

Datos eléctricos

Consumo total de energía (W)	21
Tensión de red (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear required	No
Tipo de sistema de control	LED driver constant current
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	No
Drive current (mA)	600
Corriente de irrupción (A)	17.2
Duración de irrupción	200
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Luminarias máximas por 10A C Interruptor automático	20
Max. Luminaires per 13A C Breaker	26

START DOWNLIGHT IP44 205

START Downlight 205 IP44 2025lm 840

0030329

Luminarias máximas por 16A C
Interrupor automático

Max. Luminaires per 20A C Breaker 40

Max. Luminaires per 10A B Breaker 12

Max. Luminaires per 13A B Breaker 15

Max. Luminaires per 16A B Breaker 19

Max. Luminaires per 20A B Breaker 24

Información de vida útil

Vida útil media - L70 B50 100000

Vida media - L80/B20 74000

Vida media - L90/B10 34000

Datos físicos

Color carcasa luminaria RAL 9003 - Signal white

IP rating IP44/20

IK rating IK07

Diffuser finish Opal

Diffuser material PC Polycarbonate

Acabado del reflector High-gloss

Longitud (mm) 220

Anchura (mm) 220

Nominal Product Height (mm) 60

Nominal Product Diameter (mm) 220

Cutout Dimensions (W x L in mm or
Diameter in mm) 205

Peso (kg) 0.418

Recessed Depth (mm) 150

Empaquetado

Descripción del paquete Carton

Product EAN number 5410288303291

Longitud del embalaje individual(cm) 23.4

Anchura única del embalaje (cm) 23.4

Packaging single depth (cm) 8.1

DUN14 (outer) 15410288303298

Cantidad del embalaje por cajas 12

Packaging outer length / height (cm) 48.2

Packaging outer width (cm) 48.6


Packaging outer depth (cm) 27.5

Información de seguridad

Condiciones óptimas de funcionamiento
(°C) -10-40

FOTOMETRÍA

START DOWNLIGHT IP44 205
START Downlight 205 IP44 2025lm 840
0030329

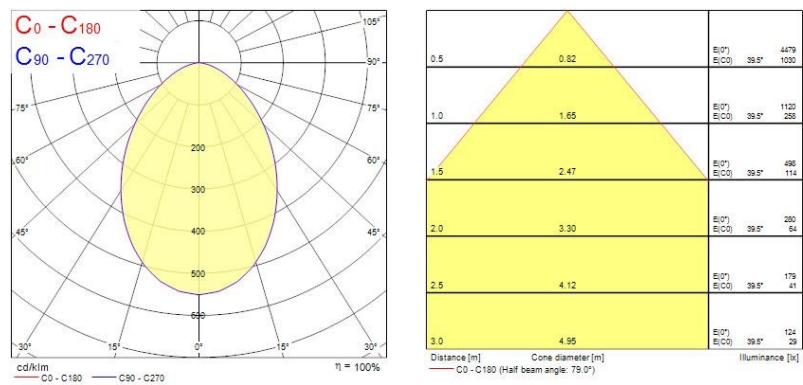

DIBUJOS TÉCNICOS

