

Beacon LED Wallwash

BEACON WW LED O/B DIM 3K L3 WHT

2059068



Características del producto

- 2059068 BEACON WW LED O/B DIM 3K L3 WHT Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for museum, gallery and display applications, die-cast aluminium body, passive cooling heatsink, uniform ceiling to floor vertical illuminance up to 4m height and 4.5m horizontal spread, beam angle: asymmetric wallwash, optics: asymmetric glass lens, colour temperature: 3000K warm white, total system power: 48W, total fixture output: 3823lm, luminaire efficacy: 80lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 50,000 hours at 70% of the original output (L70), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, dimmable, on-board potentiometer for dimming control, power factor: 0.98, electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environm...



DESCRIPCIÓN DEL PRODUCTO

Nombre del producto	BEACON WW LED O/B DIM 3K L3 WHT
Tecnología	LED
Housing	Aluminium
Montaje	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
FI del número electrónico	4276805
Warranty	5 years
Fixture luminous flux (lm)	3823
Luminaire efficacy (lm/W)	80
LOR (%)	100
Temperatura de color (K)	3000
Color de la luz	Warm White
IRC (Ra)	93
Colour Consistency (SDCM)	3
Grupo de riesgo fotobiológico	RG1
Consumo total de energía (W)	48
Tensión (V)	240
Electrical protection	Class I
Tipo de sistema de control	Electronic ballast
Minimum dimming level (%)	99
Color carcasa luminaria	White
IP rating	IP20
Product EAN number	5025768590681
Dimming method	Mains: leading / trailing edge

TABLA DE DATOS

Informacion General

Nombre del producto	BEACON WW LED O/B DIM 3K L3 WHT
---------------------	---------------------------------

Beacon LED Wallwash

BEACON WW LED O/B DIM 3K L3 WHT
2059068

Tecnología	LED
Housing	Aluminium
Montaje	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
FI del número electrónico	4276805
Warranty	5 years

Datos ópticos

Fixture luminous flux (lm)	3823
Luminaire efficacy (lm/W)	80
LOR (%)	100
Temperatura de color (K)	3000
Color de la luz	Warm White
IRC (Ra)	93
Colour Consistency (SDCM)	3
Cromaticidad ajustable	No
Grupo de riesgo fotobiológico	RG1

Datos eléctricos

Consumo total de energía (W)	48
Tensión de red (V)	220-240V
Tensión (V)	240
Lamp power factor	0.98
Electrical protection	Class I
Tipo de sistema de control	Electronic ballast
Transformer required	Sí
Minimum dimming level (%)	99
Drive current (mA)	1200
Energy Efficiency Class (A->G) of contained light source	E

Datos físicos

Color carcasa luminaria	White
IP rating	IP20
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Acabado del reflector	None
Longitud (mm)	85
Anchura (mm)	170
Nominal Product Height (mm)	175
Nominal Product Diameter (mm)	110
Peso (kg)	1.65

Empaquetado


Descripción del paquete	Carton
Product EAN number	5025768590681

Beacon LED Wallwash

BEACON WW LED O/B DIM 3K L3 WHT
2059068

Longitud del embalaje individual(cm)	25.0
Anchura única del embalaje (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768590681
Cantidad del embalaje por cajas	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0

FOTOMETRÍA

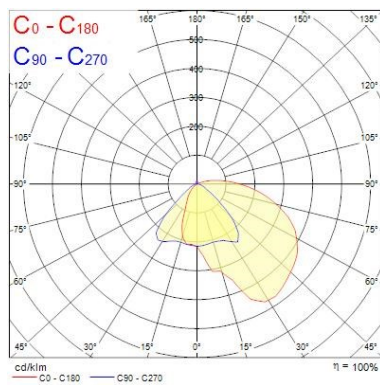

DIBUJOS TÉCNICOS

