

Beacon LED XL Muse


BEACON XL MUSE 3K O/B DIM L3 WHT

2059319



Características del producto

- 2059319 BEACON XL MUSE 3K O/B DIM L3 WHT Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 10° spot to a 70° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 10° spot to 70° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 41W, total fixture output: 2544lm, luminaire efficacy: 62lm/W, LOR: 100%, super high colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1050mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.95, electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal en...

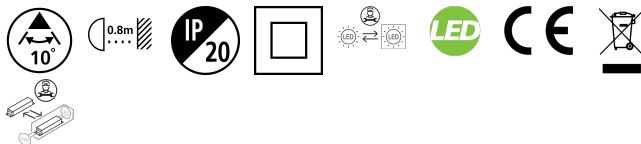

DESCRIPCIÓN DEL PRODUCTO

Nombre del producto	BEACON XL MUSE 3K O/B DIM L3 WHT
Tecnología	LED
Housing	Aluminium
Montaje	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	2544
Luminaire efficacy (lm/W)	62
LOR (%)	100
Temperatura de color (K)	3000
Color de la luz	Warm White
IRC (Ra)	97
Colour Consistency (SDCM)	3
Beam Angle (°)	10
Grupo de riesgo fotobiológico	RG0
Consumo total de energía (W)	41
Electrical protection	Class II
Tipo de sistema de control	Electronic ballast
Minimum dimming level (%)	95
Color carcasa luminaria	White
IP rating	IP20
Product EAN number	5025768593194
Dimming method	Mains: leading / trailing edge

TABLA DE DATOS

Informacion General

Nombre del producto	BEACON XL MUSE 3K O/B DIM L3 WHT
---------------------	----------------------------------

Beacon LED XL Muse

BEACON XL MUSE 3K O/B DIM L3 WHT

2059319

Tecnología	LED
Housing	Aluminium
Montaje	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

Datos ópticos

Fixture luminous flux (lm)	2544
Luminaire efficacy (lm/W)	62
LOR (%)	100
Temperatura de color (K)	3000
Color de la luz	Warm White
IRC (Ra)	97
Colour Consistency (SDCM)	3
Cromaticidad ajustable	No
Beam Angle (°)	10
Grupo de riesgo fotobiológico	RG0

Datos eléctricos

Consumo total de energía (W)	41
Tensión de red (V)	220-240V
Lamp power factor	0.95
Electrical protection	Class II
Tipo de sistema de control	Electronic ballast
Transformer required	Sí
Minimum dimming level (%)	95
Drive current (mA)	1050
Energy Efficiency Class (A->G) of contained light source	F

Información de vida útil

Vida útil media - L70 B50	100000
Vida media - L80/B20	100000
Vida media - L90/B10	86000

Datos físicos

Color carcasa luminaria	White
IP rating	IP20
Acabado del reflector	None
Anchura (mm)	165
Nominal Product Height (mm)	200
Nominal Product Diameter (mm)	115
Peso (kg)	1.7


Empaquetado

Beacon LED XL Muse

BEACON XL MUSE 3K O/B DIM L3 WHT
2059319

Descripción del paquete	Carton
Product EAN number	5025768593194
Longitud del embalaje individual(cm)	25.0
Anchura única del embalaje (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768593194
Cantidad del embalaje por cajas	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0

FOTOMETRÍA

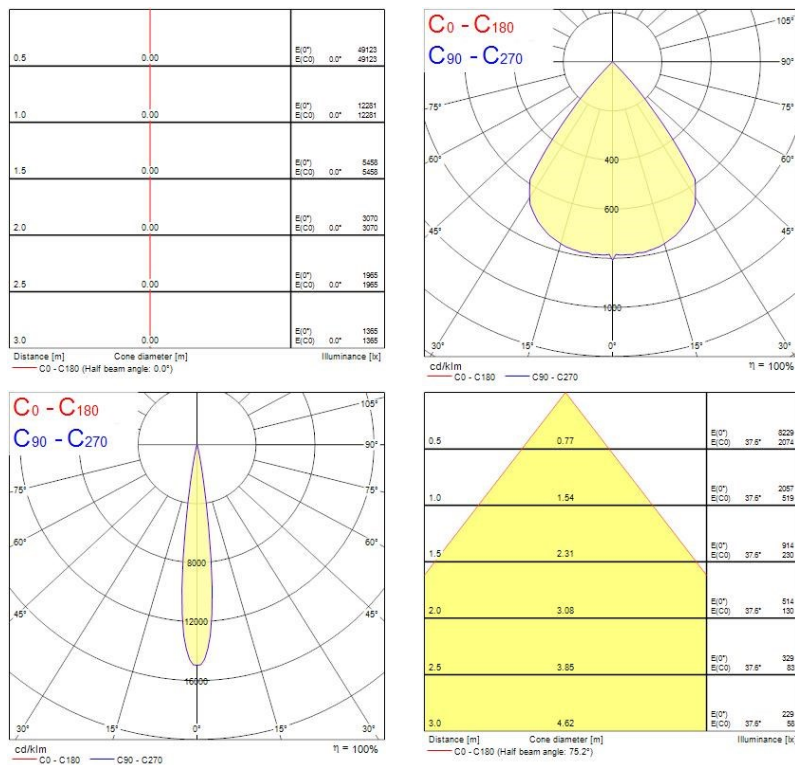

DIBUJOS TÉCNICOS

