


Art.: 4808

Bobina 30 mm x Ø 13 mm para Electroválvula / Coil 30 mm x Ø 13 mm for Solenoid Valve

Características	Features
1. Encapsulado de la bobina: - PET – Polietileno negro clase H (180°C) para voltajes 12V – 24V – 48V - PA – Poliamida negra clase F (155°C) para voltaje 110V – 220V	1. Coil housing material: - PET - Black Polyethylene class H (180°C) for voltages 12V- 24V- 48V - PA – Black Polyamide class F (155°C) for voltage 110V – 220V
2. Bobinado en clase H	2. Class H winding
3. Conexiones eléctricas para conector tripolar de 8W s/EN 175301-803	3. Electric connections for 3 poles 8W connector acc./EN 175301-803
4. Grado de protección IP65 – DIN 40050 (DIN 40050)	4. IP65 –EN 60529 (DIN 40050) degree protection

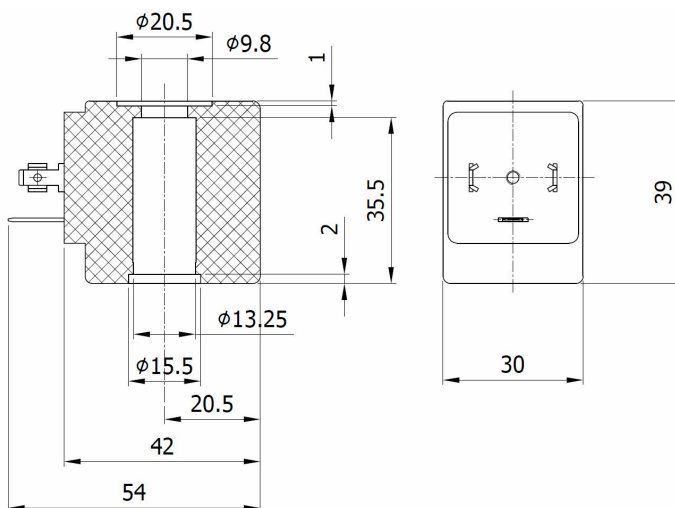

Código / Code	Potencia/ Power	Tensiones / Voltages	ED	Ambient Temperature	Certificados / Certificates
4808 C12V	8 W	12V DC	100%	-10°C +40°C	CE
4808 C24V	8 W	24V DC	100%	-10°C +40°C	CE
4808 A12V	14,5 VA	12V 50Hz	100%	-10°C +40°C	CE
4808 A24V	14,5 VA	24V 50/60 Hz	100%	-10°C +40°C	CE
4808 A48V	15 VA	48V 50/60 Hz	100%	-20°C +60°C	CE-UL-CSA-VDE
4808 C48V	10W	48V DC	100%	-20°C +60°C	CE-UL-CSA-VDE
4808 110V	14,5 VA	110V 50/60Hz	100%	-10°C +40°C	CE
4808 220V	14,5 VA	220/230V 50/60Hz	100%	-10°C +40°C	CE
4808 380V	14,5 VA	380V 50/60Hz	100%	-10°C +40°C	CE

Tolerancia sobre la tensión nominal : DC +10% -5% / AC +10% -15%
Nominal voltages tolerance : DC +10% -5% / AC +10% -15%