

MINIMAL TRACK 24V Profile 2m

A384-02-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT	40W	24V	280 x 30 x 24mm
		A384-00-08- NT	100W	24V	280 x 30 x 24mm
220 / 240 V ~			Included ON/OFF 24Vdc Power Supply.		
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm
220 / 240 V ~					
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI/PUSH	24V	181 x 42 x 20mm
		0433-01-33	CASAMBI	24V	172 x 42 x 20mm
		0434-01-64	WIFI	24V	105 x 44 x 23mm
24V					

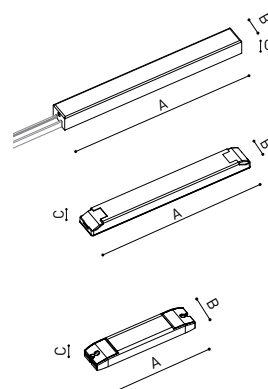

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		30	30	30	30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

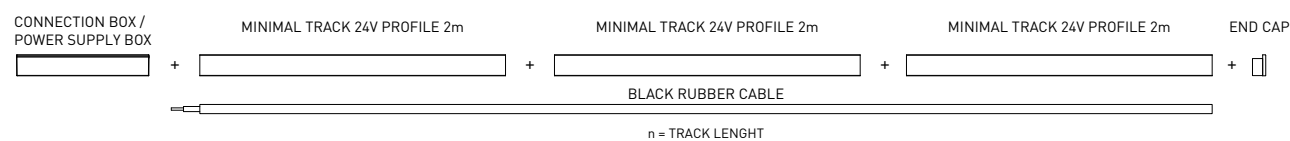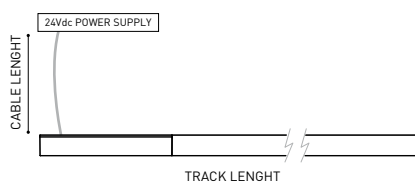

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT