
LINE 48V

ARKOSLIGHT®



DIMENSIONES



ACCESORIOS

TRACK 48V OPTIONS

	PRODUCTO
Nombre	LINE 500 48V 3000K N
Referencia	A3761011N
Color	Negro Mate
RAL	Anodizado, baño de color, similar a RAL 9005
Categoría	TRACKLIGHTS

	FUENTE DE LUZ
Tipo	LED
Flujo Luminoso	1600 Lm
Potencia	10,5 W
Potencia del sistema	11,05 W
Temperatura de color	3000 K
Índice de reproducción cromática	CRI>90
Estabilidad cromática	MacAdam Step 2
Ángulo del haz de luz	98°
Eficiencia lumínica	43%
Eficacia	152 Lm/W
Corriente	350 mA
Control por bluetooth	Consultar
Driver	Incluido
Clase de Seguridad Eléctrica	III
Tensión	48 Vdc
Horas de Vida del LED	L80B10 (Tj=85°C) >60.000h

	OTROS DATOS
Estanqueidad	IP20
Tipo de carril	Track 48V
Peso	230 g.
Peso con embalaje	400 g.
Dimensiones embalaje	Ø55 × 550 mm
Unidades por embalaje	1
Materiales	Aluminio / Policarbonato

CE

Line 48V es la luminaria lineal de luz difusa para aplicación en carril de bajo voltaje 48V. Esta solución traslada a este sistema de carril las características lumínicas y las ventajas de la iluminación longitudinal con difusor para aplicaciones de luz general.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

03-11-21 / 05:30

5 Year GUARANTEE*

DIAGRAMA POLAR


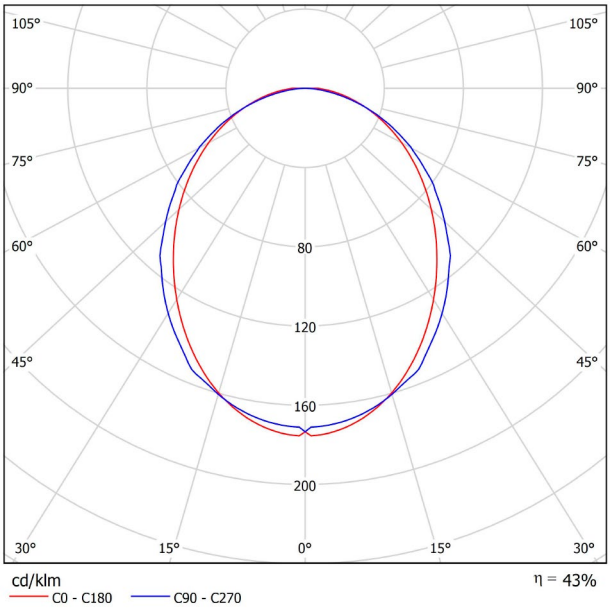


DIAGRAMA CÓNICO

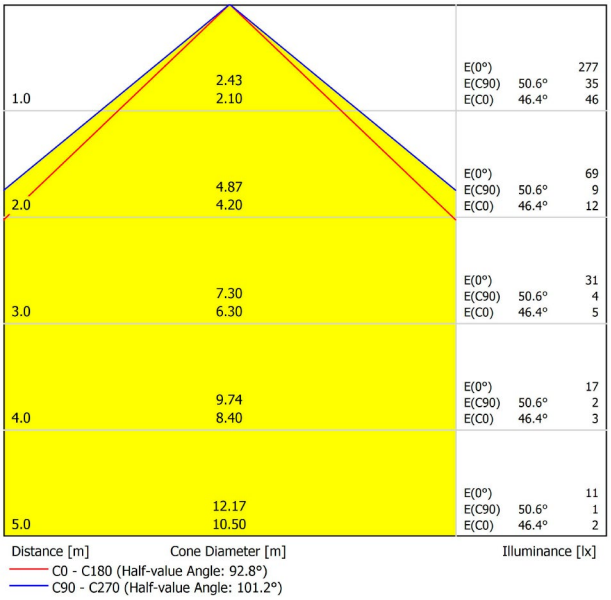


Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

TRACK 48V






TRACK 48V TRIMLESS

TRACK 48V TRIMLESS 1m	A338-01-00-	WT	N	
TRACK 48V TRIMLESS 2m	A338-02-00-	WT	N	
TRACK 48V TRIMLESS 3m	A338-03-00-	WT	N	
TRACK 48V TRIMLESS Corner 90º One Plane	A338-06-00-	WT	N	
TRACK 48V TRIMLESS Corner 90º Two Planes	A338-07-00-	WT	N	

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)


CE III

TRACK 48V TRIMLESS
Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS
Corner 90º Two Planes



*Electrical connection not included






TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	WT	NT	
TRACK 48V SURFACE 2m	A338-12-00-	WT	NT	
TRACK 48V SURFACE 3m	A338-13-00-	WT	NT	
TRACK 48V SURFACE Corner 90º One Plane	A338-14-00-	WT	NT	


CE III

TRACK 48V SURFACE
Corner 90º One Plane



*Electrical connection not included






TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	WT	NT	
TRACK 48V SURFACE SHORT 2m	A338-22-00-	WT	NT	
TRACK 48V SURFACE SHORT 3m	A338-23-00-	WT	NT	
TRACK 48V SURFACE SHORT Corner 90º One Plane	A338-24-00-	WT	NT	

CE III


TRACK 48V SURFACE SHORT
Corner 90º One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

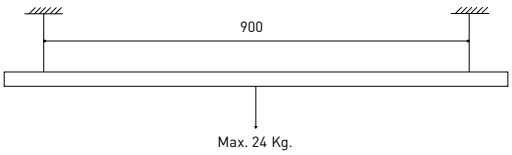

		P	V	D
CONSTANT VOLTAGE LED POWER SUPPLY	**0434-01-21**	75W	48V	180 x 52 x 30mm
	0434-01-22	150W	48V	240 x 60 x 49mm


220 / 240 V ~


DROP VOLTAGE TABLE

		CABLE LENGHT (m)			
		5	10	20	30
POWER (W)	**CABLE SECTION** (mm^2)	**TRACK LENGHT** (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

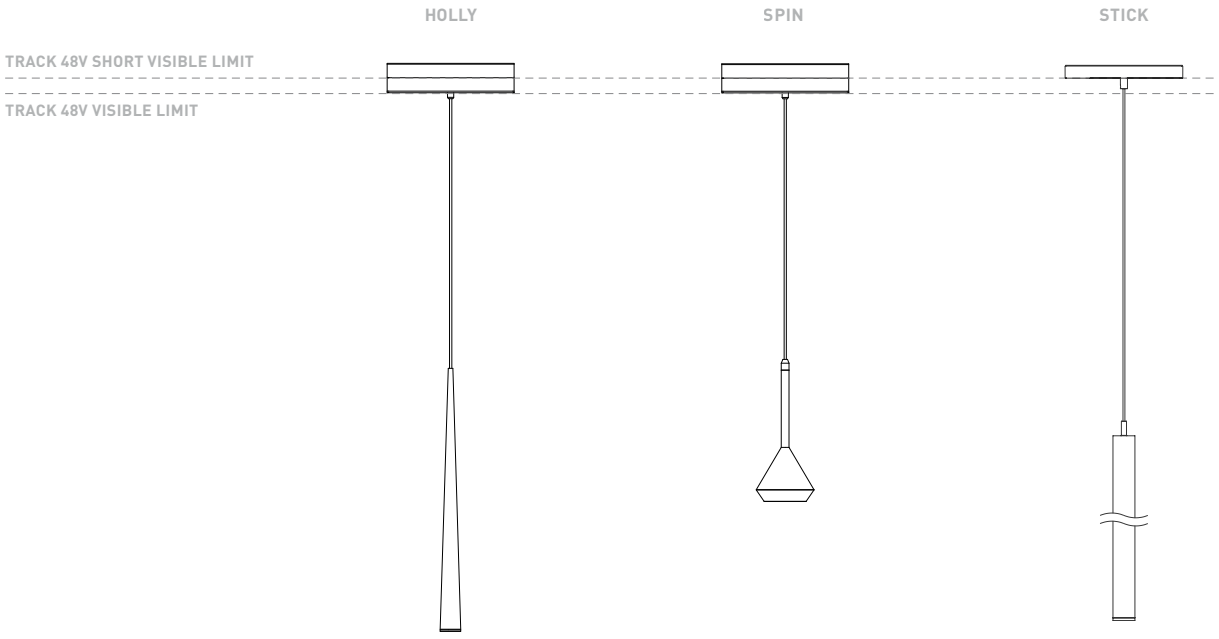




Order with *The 2019 Collection* codes. Products with one single version for both tracks


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | W | N |




TRACK 48V Central Connector

A338-00-02- | W | N |




TRACK 48V Corner Connector

A338-00-12- | W | N |



TRACK 48V Wireless Control

0434-01-31- | W | N | Casambi/AAG Stucchi App



TRACK 48V Corner 90º Connector One Plane

A338-00-24- | W | N |

*Not suitable for trimless version

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05- | WT | N |



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities




TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11

COLOUR | **N** ■ RAL 9005 | **W** □ RAL 9016 | **NT** ■ RAL 9005 | **WT** □ RAL 9016 |

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | WT | NT |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | WT | NT |

SURFACE & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | WT | NT |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | WT | NT |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | WT | NT | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | WT | NT | NO DIM

A338-00-23- | WT | NT | DIM

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | WT | NT |




TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | W | N | NO DIM

A338-00-17- | W | N | DIM

*For remote power supply

WIRE TRIMLESS ACCESSORIES



FEED


MAINS TRIMLESS*

A023-00-01- | W | N | NO DIM

MAINS THICK TRIMLESS*

A023-00-02- | W | N | DIM

REMOTE INCL Ø20




FASTENING

STEEL CABLE TRIMLESS*

A023-00-05- | W | N |

INCL Ø20

MAINS TRIMLESS



MAINS THICK TRIMLESS



STEEL CABLE TRIMLESS

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT