


MINIMAL TRACK TRIMLESS


ARKOSLIGHT



MINIMAL TRACK 24V Trimless

Profile 2m

A467-02-00- | N |



MINIMAL TRACK 24V Trimless

Rubber Cable n x 1m

A467-00-01- | N |

n = Total Length of System.


24V | Max. 4A

MINIMAL TRACK 24V Trimless

Corner 90° 1 Plane

A467-00-02- | N |


Cable Length = 140mm.



MINIMAL TRACK 24V Trimless

Corner 90° 1 Plane Connector

A467-00-03- | N |




MINIMAL TRACK 24V Trimless

Corner 90° 2 Planes

A467-00-04- | N |

Cable Length = 200mm.



MINIMAL TRACK 24V Trimless

End Caps

A467-00-05- | N |

Two End Caps Included



MINIMAL TRACK 24V Trimless

Straight Joiner


A467-00-06



MINIMAL TRACK 24V Trimless

Connection Box

A467-00-07- | N |



MINIMAL TRACK 24V Remote Power Supply

ON/OFF

0434-01-37

P

V

D [A x B x C]

60W

24V

180 x 52 x 30mm


0433-10-22

100W

24V

295 x 43 x 30mm

220
240 V~



MINIMAL TRACK 24V Remote Constant Voltage Dimmer



0433-01-32

DALI / Push

24V

181 x 42 x 20mm

0433-01-33

CASAMBI

24V


172 x 42 x 20mm

0434-01-64

WIFI

24V

105 x 44 x 23mm





24V

DROP VOLTAGE TABLE

POWER [W]	CABLE SECTION [mm²]	CABLE LENGTH [m]			
		<5	<10	<20	<30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

Reduce 5 meters per each 'Corner 90° 1 Plane CONNECTOR' used.

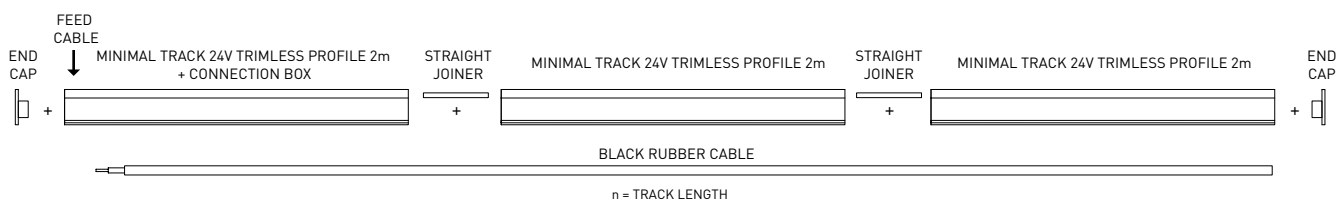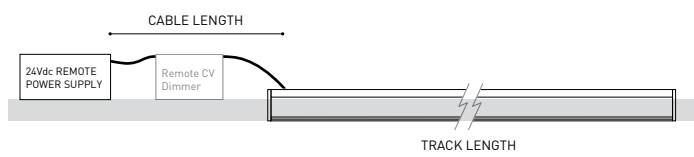

COLOUR | N ■ | DIM OPTIONS PLEASE CONSULT